



PLAN

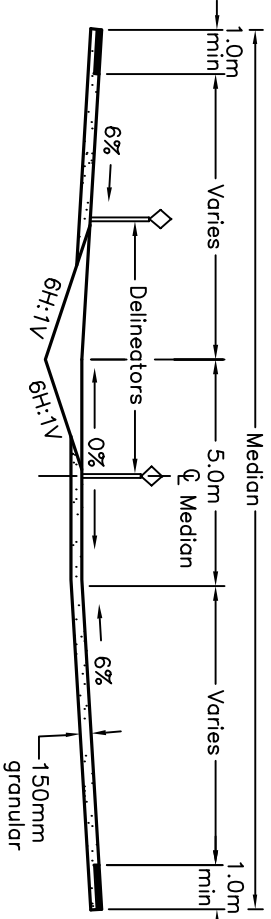

SECTION A-A

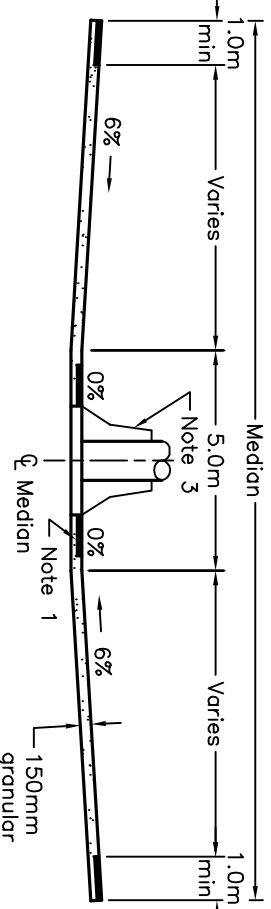

SECTION B-B

NOTES:

- 1 When concrete barrier is used around piers, a 1.0m wide paved area is required in front of barrier.
- 2 Length varies depending on the length of barrier transition required to accommodate the width of hazard.
- 3 Traffic barriers as specified.
- 4 Delineators shall be installed at 1.5m intervals at the leaving end of the energy attenuator.

LEGEND:

X = distance from edge of driving lane to center line of energy attenuator

- A Delineation shall be according to OPSD 984.101.
 B Drainage as required.
 C All dimensions are in millimetres unless otherwise shown.

ONTARIO PROVINCIAL STANDARD DRAWING

Nov 2016 Rev 2

**ENERGY ATTENUATOR, GENERAL
 INSTALLATION-GRANULAR APPROACH PAD, MEDIAN**

OPSD 921.101

