


**TANGENT**

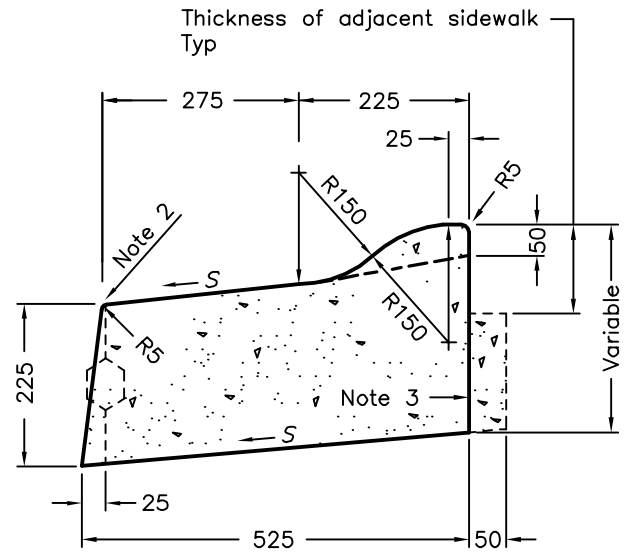

**SUPERELEVATED**

**LEGEND:**

S – Rate of pavement super-elevation in percent, %.

**NOTES:**

- 1 When curb and gutter is adjacent to concrete pavement or base, this drawing shall be used in conjunction with OPSD 552.010 and 552.020.
- 2 Flexible and composite pavement shall be placed 5mm above the adjacent edge of gutter.
- 3 For slipforming procedure a 5% batter is acceptable.
- A Treatment at entrances shall be according to OPSD 351.010.
- B Outlet treatment shall be according to the OPSD 610 Series.
- C The transition from one curb type to another shall be a minimum length of 3.0m, except in conjunction with guide rail where it shall be according to the OPSD 900 Series.
- D All dimensions are in millimetres unless otherwise shown.

ONTARIO PROVINCIAL STANDARD DRAWING

Nov 2012 | Rev | 2

**CONCRETE SEMI-MOUNTABLE  
CURB WITH STANDARD GUTTER**



**OPSD 600.060**