


### EARTH EMBANKMENT

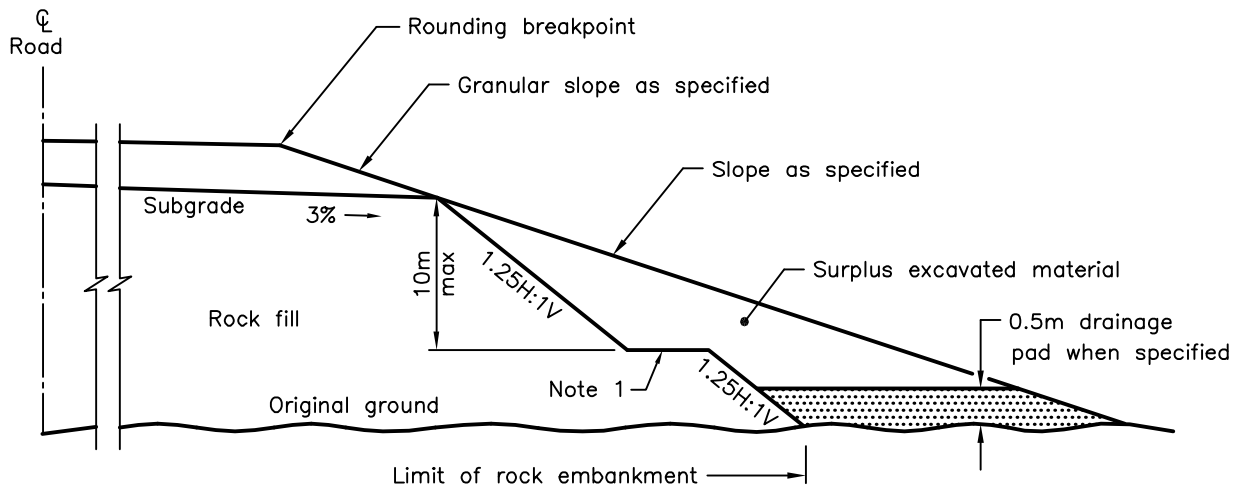

### ROCK EMBANKMENT

#### NOTES:

1 Benches 2m minimum in width are required along slopes at maximum vertical intervals as shown.

A Height of fill is the vertical difference between top of subgrade and top of original ground measured at new road centreline.

B Surplus excavated material placed shall not extend beyond the right-of-way.

C All dimensions are in metres unless otherwise shown.

ONTARIO PROVINCIAL STANDARD DRAWING

Nov 2016

Rev 3

**SLOPE FLATTENING  
USING SURPLUS EXCAVATED MATERIAL  
ON EARTH OR ROCK EMBANKMENT**



**OPSD 202.010**