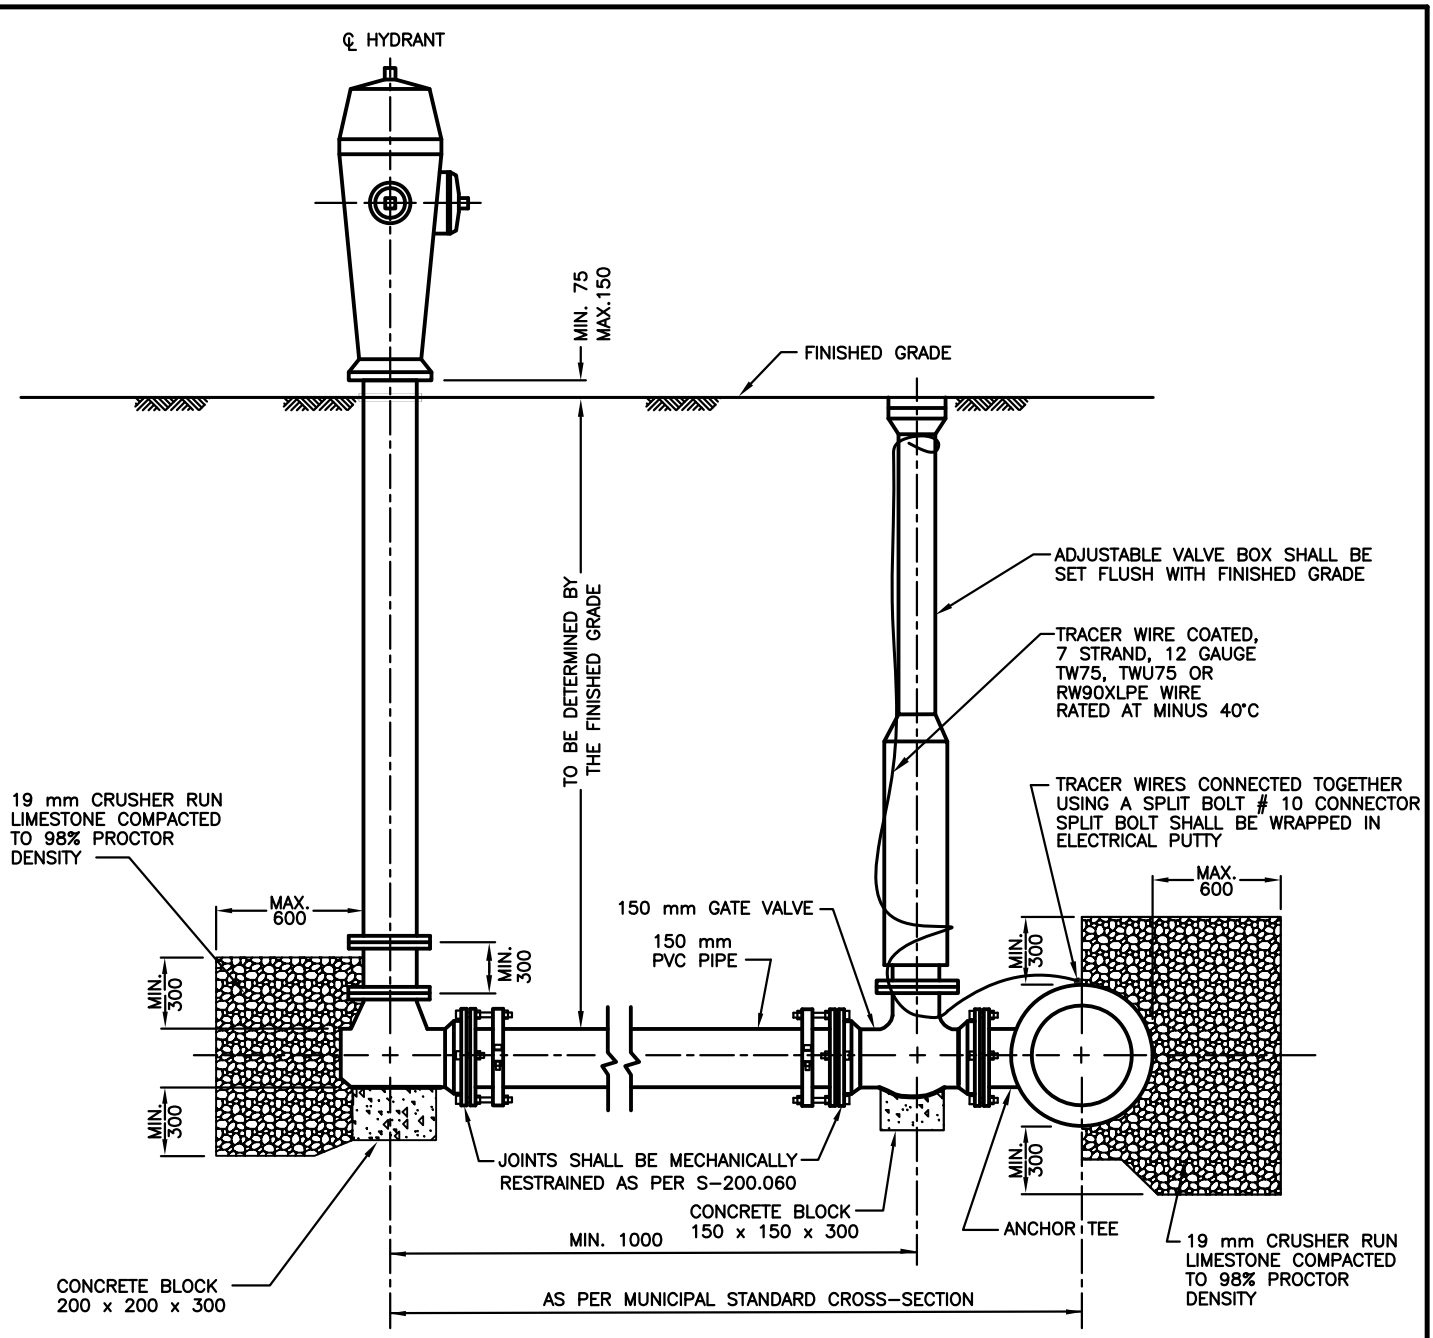

NOTES

1. JOINTS SHALL BE MECHANICALLY RESTRAINED.
2. BEDDING AS PER S–200.010.
3. HYDRANT EXTENSIONS SHALL BE INSTALLED AT BOTTOM OF BARREL.
4. ANCHOR TEE, VALVE & HYDRANT SHALL BE COMPLETELY BACKFILLED WITH 19 mm CRUSHER RUN LIMESTONE.
5. IF HYDRANT REQUIRES ACCESS ACROSS DITCH, INSTALLATION SHALL BE AS PER S–210.030.
6. TRACER WIRE COATED, AS PER AMPL.
7. TRACER WIRE SHALL BE INSTALLED AT ALL HYDRANT LOCATIONS.
8. CATHODIC PROTECTION, BONDING CABLE AND TRACER WIRE SHALL BE AS PER S–201.030, S–201.031.

ALL DIMENSIONS IN MILLIMETRES EXCEPT WHERE NOTED.

DURHAM REGION
WORKS DEPARTMENT

HYDRANT SET WITH MECHANICALLY RESTRAINED JOINTS

DWG. DATE:	1978 03
REVISION NO.:	18
REV. DATE:	2014 04
SCALE:	N.T.S.

S-210.010