




**JOINT IN CONCRETE OVERLAY  
DIRECTLY ABOVE JOINT  
IN BRIDGE DECK**

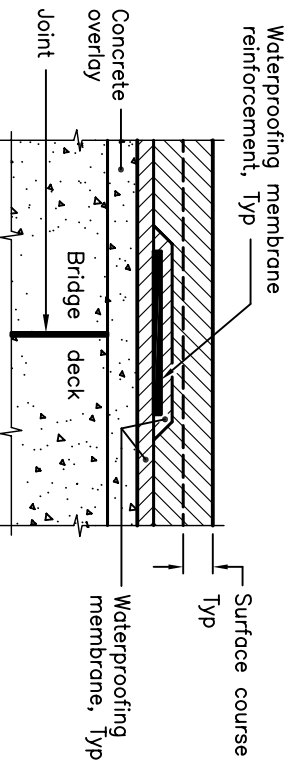


**NO JOINT IN CONCRETE OVERLAY  
JOINT IN BRIDGE DECK**

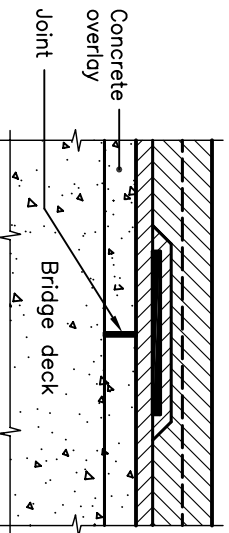


**JOINT IN CONCRETE OVERLAY  
NO JOINT IN BRIDGE DECK**

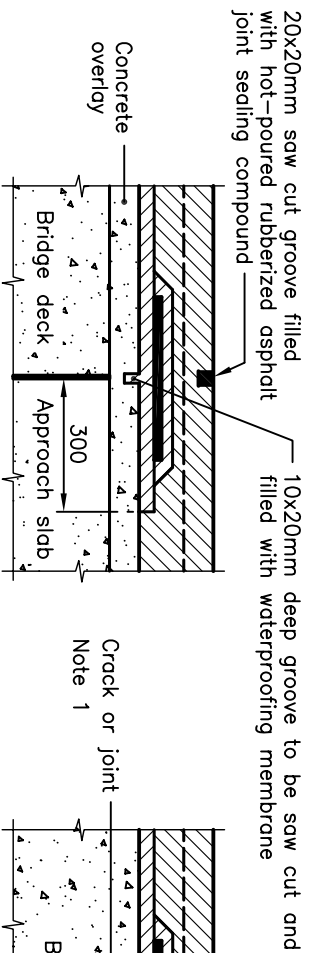


**JOINT BETWEEN BRIDGE DECK  
AND APPROACH SLAB  
WITH CONCRETE OVERLAY**

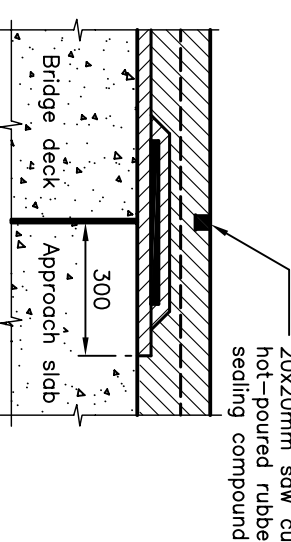

**JOINT BETWEEN BRIDGE DECK  
AND APPROACH SLAB  
WITHOUT CONCRETE OVERLAY**

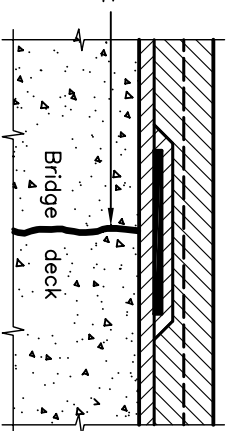

**JOINT OR ACTIVE WIDE CRACK  
IN BRIDGE DECK**

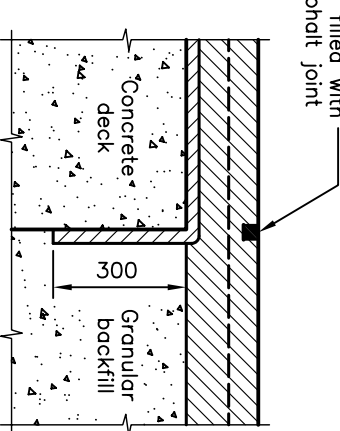

**JOINT BETWEEN CONCRETE DECK  
AND GRANULAR BACKFILL**

**NOTES:**

- 1 Cracks in concrete to be repaired as specified.
- A This OPSD is to be read in conjunction with OPSD 3370.100.
- B Protection board is not shown for clarity.
- C All dimensions are in millimetres unless otherwise shown.

<b>ONTARIO PROVINCIAL STANDARD DRAWING</b>		Nov 2008	Rev 2
<b>DECK, WATERPROOFING HOT APPLIED ASPHALT MEMBRANE AT ACTIVE CRACKS GREATER THAN 2mm WIDE AND CONSTRUCTION JOINTS</b>		OPSD 3370.101	

