


**PLAN**

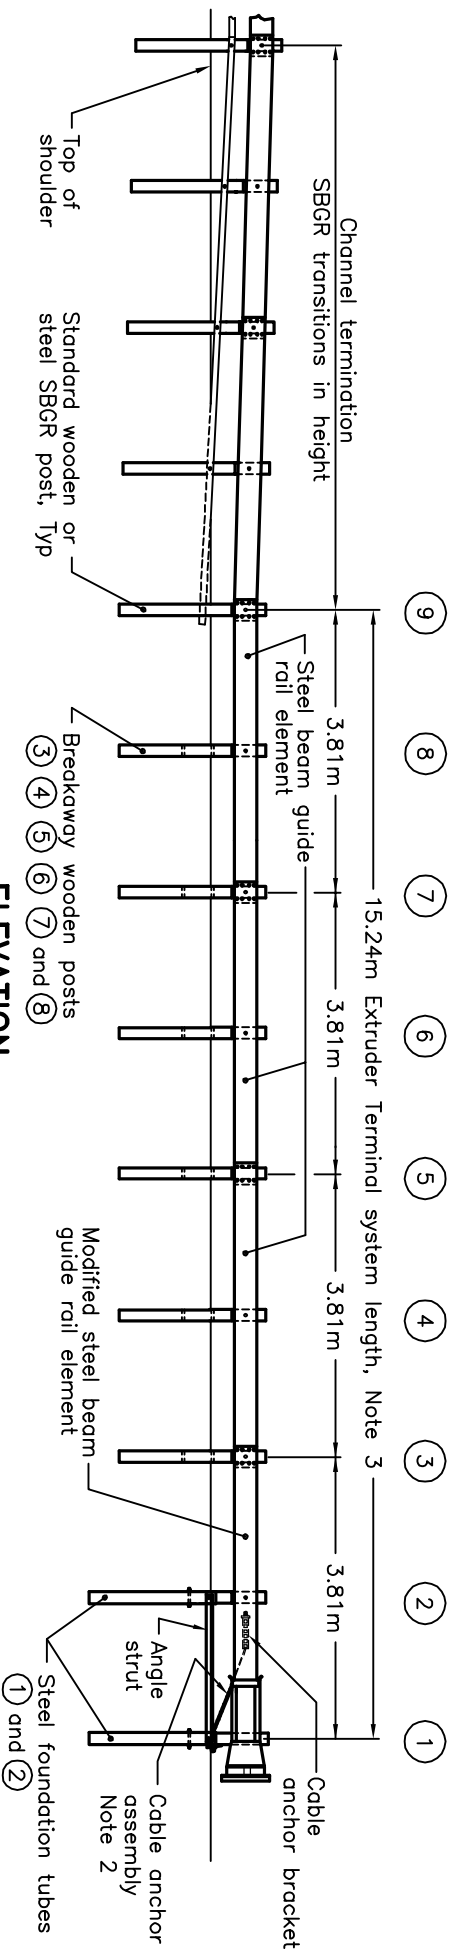

**ELEVATION**

**NOTES:**

- 1 This OP912 shows right shoulder installation. The Extruder Terminal shall be inverted for left shoulder installation.
- 2 Two nuts and a washer shall be installed and locked tight at each end of the cable assembly.
- 3 The system length shall be installed in a straight line parallel to the roadway, at a 50:1 flare rate, or at a 25:1 flare rate as specified.

A Delineation shall be according to OP912 984.201 and 984.202.  
 B The system depicted here is a proprietary product.

C System configuration meets NCHRP Report 350 TL-3.

D This OP912 to be read in conjunction with OP912 202.031 or 202.032 as specified.

E All dimensions are in millimetres unless otherwise shown.

ONTARIO PROVINCIAL STANDARD DRAWING		Nov 2010	Rev 5	
<b>ENERGY ATTENUATOR, END TREATMENT          STEEL BEAM ENERGY ATTENUATING TERMINAL          EXTRUDER TERMINAL SYSTEM          WITH WOODEN POSTS, INSTALLATION</b>				
		OP912 922.530		