



End of SBGR installation with steel posts, OPSD 912.130

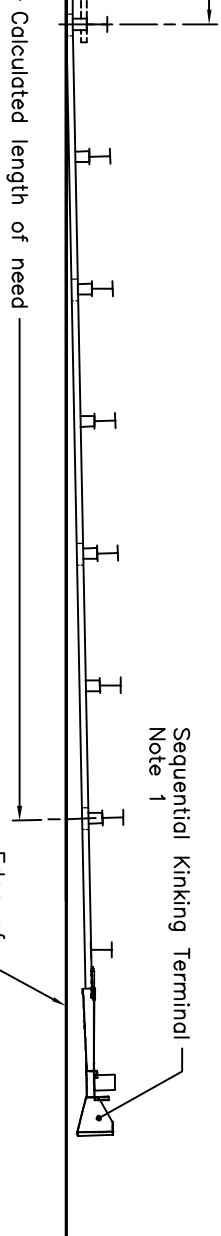

PLAN

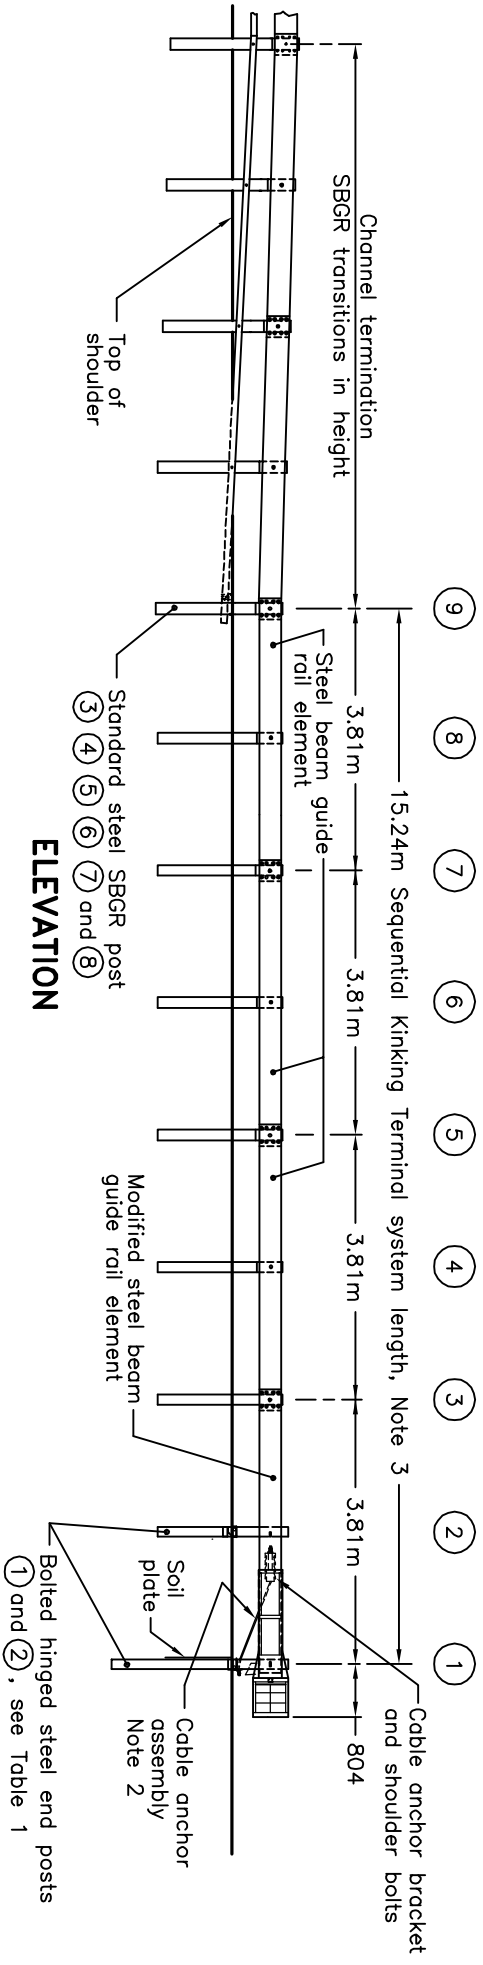

ELEVATION

NOTES:

- 1 This OPSD shows right shoulder installation. The Sequential Kinking Terminal shall be inverted for left shoulder installation.
- 2 Two nuts and a washer shall be installed and locked tight at each end of the cable anchor assembly.
- 3 The system length shall be installed in a straight line parallel to the roadway, at a 50:1 flare rate, or at a 25:1 flare rate as specified.
- A Delineation shall be according to OPSPD 984.201 and 984.202.
- B The system depicted here is a proprietary product.
- C System configuration meets NCHRP Report 350 TL-3.
- D This OPSPD to be read in conjunction with OPSPD 202.031 or 202.032 as specified.
- E All dimensions are in millimetres unless otherwise shown.

Post	1	2
Upper	Tube 6x6x1/8"	W6x9
Lower	W6x15	W6x9

ONTARIO PROVINCIAL STANDARD DRAWING

**ENERGY ATTENUATOR, END TREATMENT
STEEL BEAM ENERGY ATTENUATING TERMINAL
SEQUENTIAL KINKING TERMINAL SYSTEM
WITH STEEL POSTS, INSTALLATION**

Nov 2010 Rev 2



OPSD 922.181