


PLAN

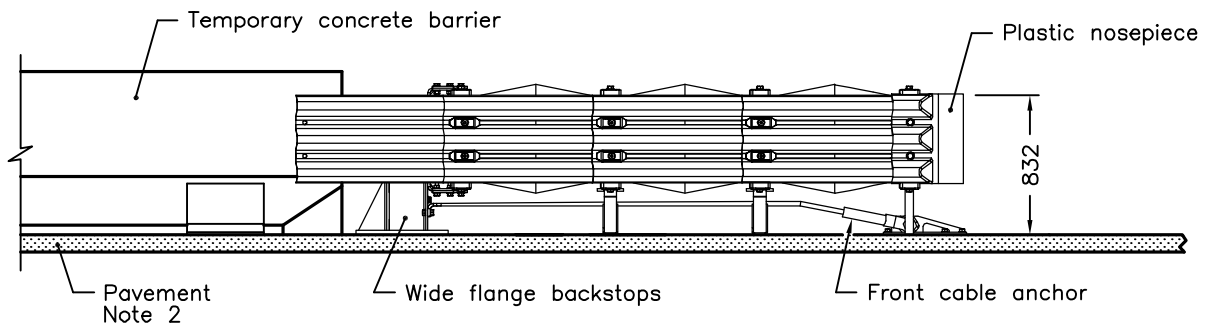

ELEVATION

NOTES:

- 1 2 Type A and 4 Type B cartridges.
- 2 When system is placed on a concrete pad, the pad shall be according to OPSD 923.005.
- 3 Adjacent temporary concrete barriers shall be modified and anchored according to OPSD 923.002.
- 4 Maximum width of object shall be 2200mm for the first 762mm behind the rear fender panels.
- A Delineation shall be according to OPSD 984.203.
- B Nominal system width is 2290mm.
- C The system depicted here is a proprietary product.
- D System configuration meets NCHRP Report 350 test level.
- E All dimensions are in millimetres unless otherwise shown.

ONTARIO PROVINCIAL STANDARD DRAWING
**ENERGY ATTENUATOR, CRASH CUSHION
 TAU-II EXTRA WIDE SYSTEM - TL-2
 INSTALLATION - TEMPORARY
 UNIDIRECTIONAL**

Nov 2011 | Rev 0



OPSD 923.388