



End of SBGR installation with wooden or steel posts, OPSPD 912.130 or 912.140

Channel when specified

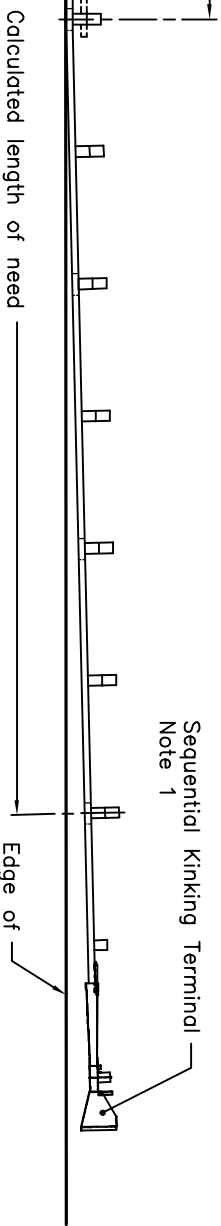

PLAN

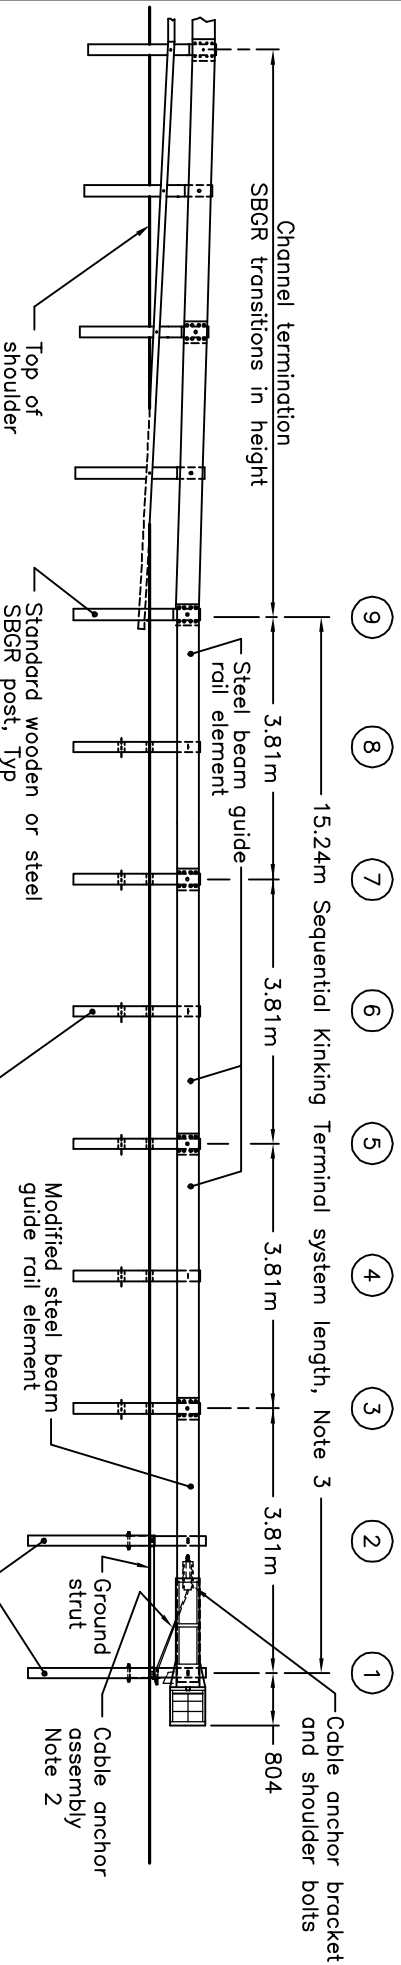

ELEVATION

NOTES:

- 1 This OPSPD shows right shoulder installation. The Sequential Kinking Terminal shall be inverted for left shoulder installation.
- 2 Two nuts and a washer shall be installed and locked tight at each end of the cable anchor assembly.
- 3 The system length shall be installed in a straight line parallel to the roadway, at a 50:1 flare rate, or at a 25:1 flare rate as specified.

- A Delineation shall be according to OPSPD 984.201 and 984.202.
- B The system depicted here is a proprietary product.
- C System configuration meets NCHRP Report 350 TL-3.
- D This OPSPD to be read in conjunction with OPSPD 202.031 or 202.032 as specified.
- E All dimensions are in millimetres unless otherwise shown.

ONTARIO PROVINCIAL STANDARD DRAWING
ENERGY ATTENUATOR, END TREATMENT
STEEL BEAM ENERGY ATTENUATING TERMINAL
SEQUENTIAL KINKING TERMINAL SYSTEM
WITH WOODEN POSTS, INSTALLATION

Nov 2010 Rev 2

OPSPD 922.180

