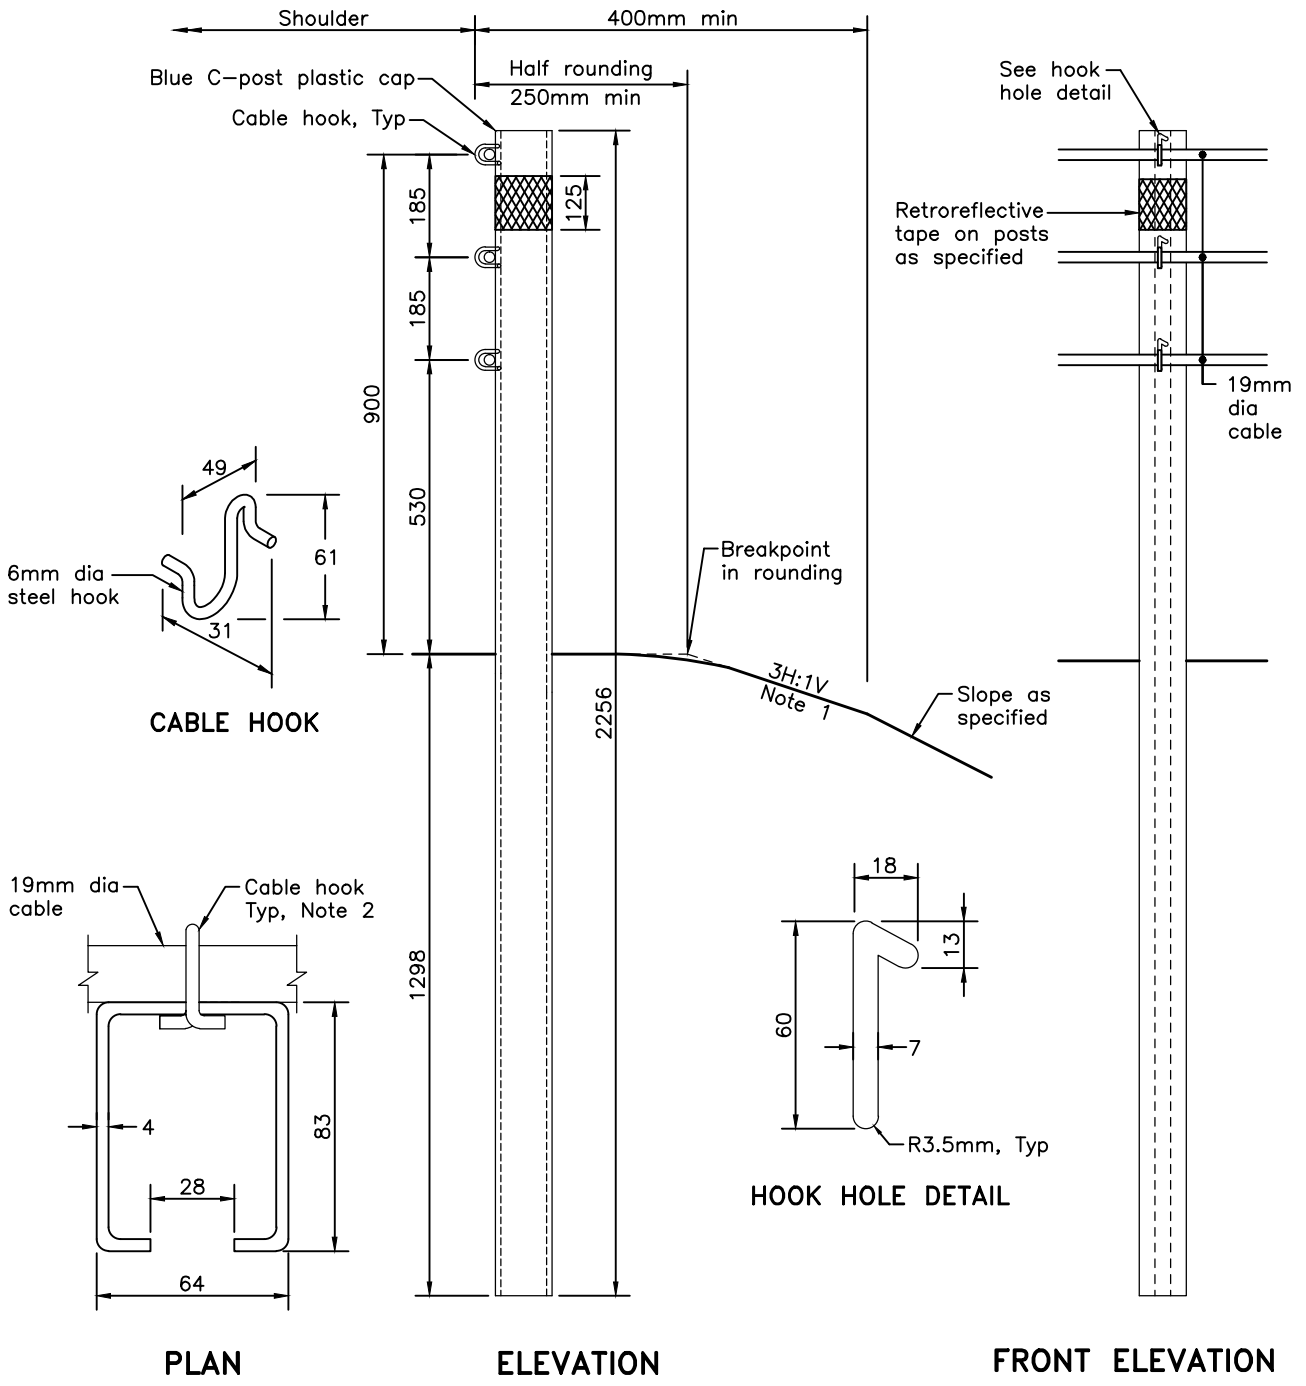

NOTES:

1 Desirable 3H:1V or flatter slope. Minimum 2H:1V slope when specified.

2 Cable hook shall be inserted into hole with rubber grommet.

A The components depicted here are proprietary.

B ASTM A1011 Grade 60 steel post hot dip galvanized according to ASTM F1043.

C All dimensions are in millimetres unless otherwise shown.

ONTARIO PROVINCIAL STANDARD DRAWING	Apr 2018	Rev	0
GUIDE RAIL SYSTEM, HIGH TENSION CABLE SAFENCE, 3–CABLE SHOULDER INSTALLATION LINE POST COMPONENT			
	OPSD 913.253		